


Brilliant Tech Specs

Transform any house or apartment into an easy-to-use smart home.



Second Generation Panels

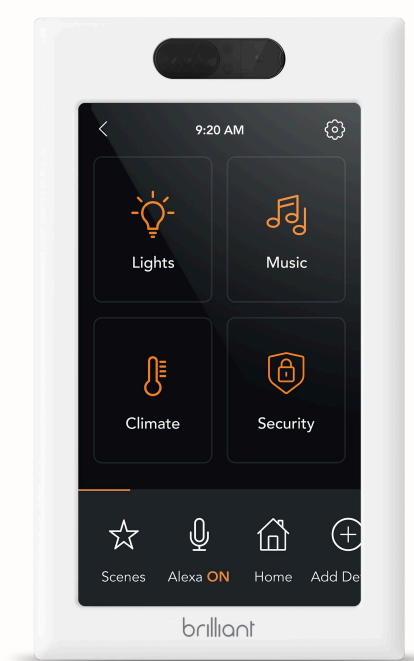

1-Switch Panel
Installs in 1-gang box

2-Switch Panel
Installs in 2-gang box

3-Switch Panel
Installs in 3-gang box

4-Switch Panel
Installs in 4-gang box

PoE 2-Switch Panel
Power over Ethernet

Smart Dimmer Switch

Smart Plug

Size	5.6 x 3.3 inches	5.3 x 4.75 inches	5.3 x 6.4 inches	5.3 x 8.2 inches	5.3 x 4.75 inches	4.1 x 1.6 inches	2 x 2 inches
Power	Wired - hardwires into 120V AC in an electrical box. Requires neutral and ground wires.				Powered via an Ethernet cable.	120V AC. Requires neutral and ground wires.	120V outlet
Screen	5-inch (diagonal) LCD touchscreen with 720x1280 resolution.						
Camera	Up to 720p, includes physical privacy shutter.						
Sensors	Microphone, speaker, motion sensor, capacitive touch sensor, temperature sensor, and ambient light sensor (Camera and microphone may be shut off with privacy toggle.)					Motion sensor, capacitive touch sensor	
Connectivity	WiFi 802.11 b/g/n @ 2.4 GHz & 5 GHz dual-band support and local wireless network				Ethernet connectivity & 2.4 GHz & 5 GHz WiFi	Local mesh network	Local mesh network
Colors	White frame included; Ivory, Light Almond, Gray, Black, and Silver frames sold separately.					White, Gray, Black, Light Almond; fits any Decora wall plate.	White
Lighting	Supports up to 300W incandescent and halogen and up to 150W LED and CFL (load ratings are per switch location). Supports dimming and multiway lighting. Supports compatible smart bulbs and switches. Magnetic low voltage (MLV) lighting not supported.				Supports compatible smart bulbs and switches.	Up to 500W incandescent and halogen, up to 200W LED and CFL	Plug load limit is 1200 watts
Mobile App	Brilliant app for iOS and Android.					Brilliant app for iOS and Android	Brilliant app for iOS and Android


Learn more at www.brilliant.tech

Brilliant Products Overview

Transform any house or apartment into an easy-to-use smart home.



Home Control Panels




Brilliant touchscreen panels make it easy for everyone at home to control lighting, cameras, locks, music, climate, shades, intercom, scenes, and more. They are easy to install, integrate with popular smart home products, and include a free mobile app.


HIGHLIGHTS

- Second Generation wired and PoE controls available
- Control Ring, Google Nest, Sonos, Schlage, Kwikset, Yale, Honeywell Home, and more
- Built-in Alexa voice control, camera with privacy shutter, motion sensor, and intercom
- Offers home automation, scenes, and motion-controlled lighting
- Remote control via all-in-one Brilliant mobile app (iOS and Android)
- Install in the place of a light switch or anywhere an Ethernet cable can be run


MODELS

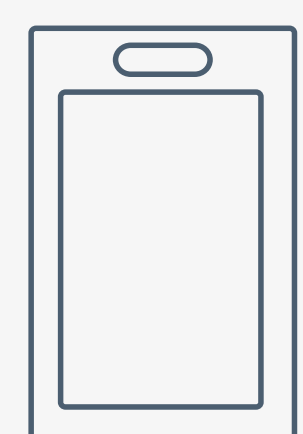


1-Switch
Panel
Wired

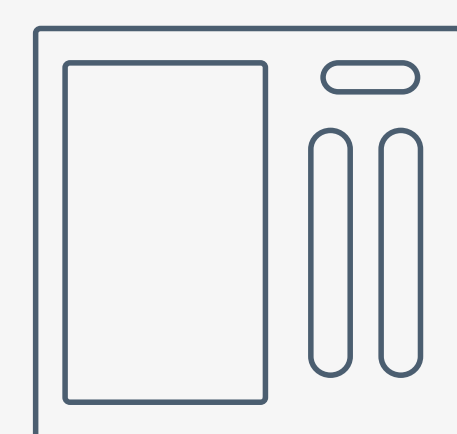


2-Switch
Panel
Wired

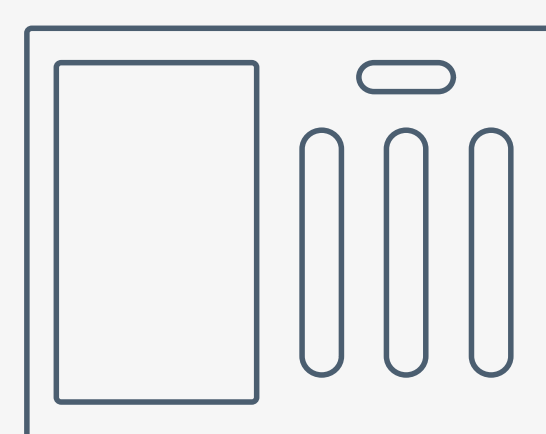

3-Switch
Panel
Wired

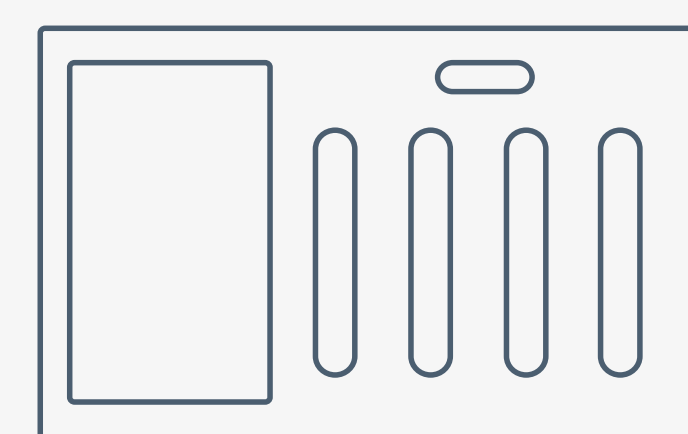

4-Switch
Panel
Wired

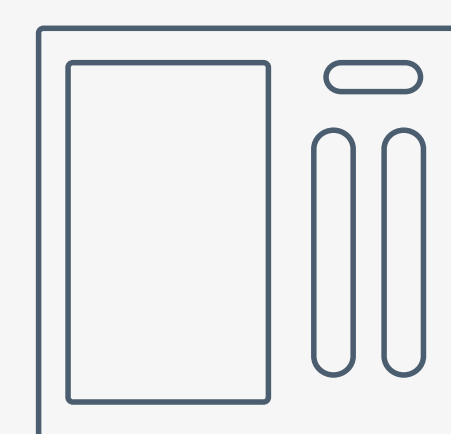

2-Switch
Panel
PoE



Smart Dimmer Switch



Turn regular lights into smart lights and make smart bulbs even smarter. Automatically turn lights on and off using the built-in motion sensor. Make lights accessible via touchscreen menus, dimming sliders, voice, scenes, and the Brilliant app.



Smart Plug

Make lamps and whatever you plug into wall outlets smart. The Brilliant Smart Plug adds smart home connectivity, voice control, and scene control to any outlet at home.

At least one Brilliant Control must be installed.

